





CT LightSpeed Pro 16

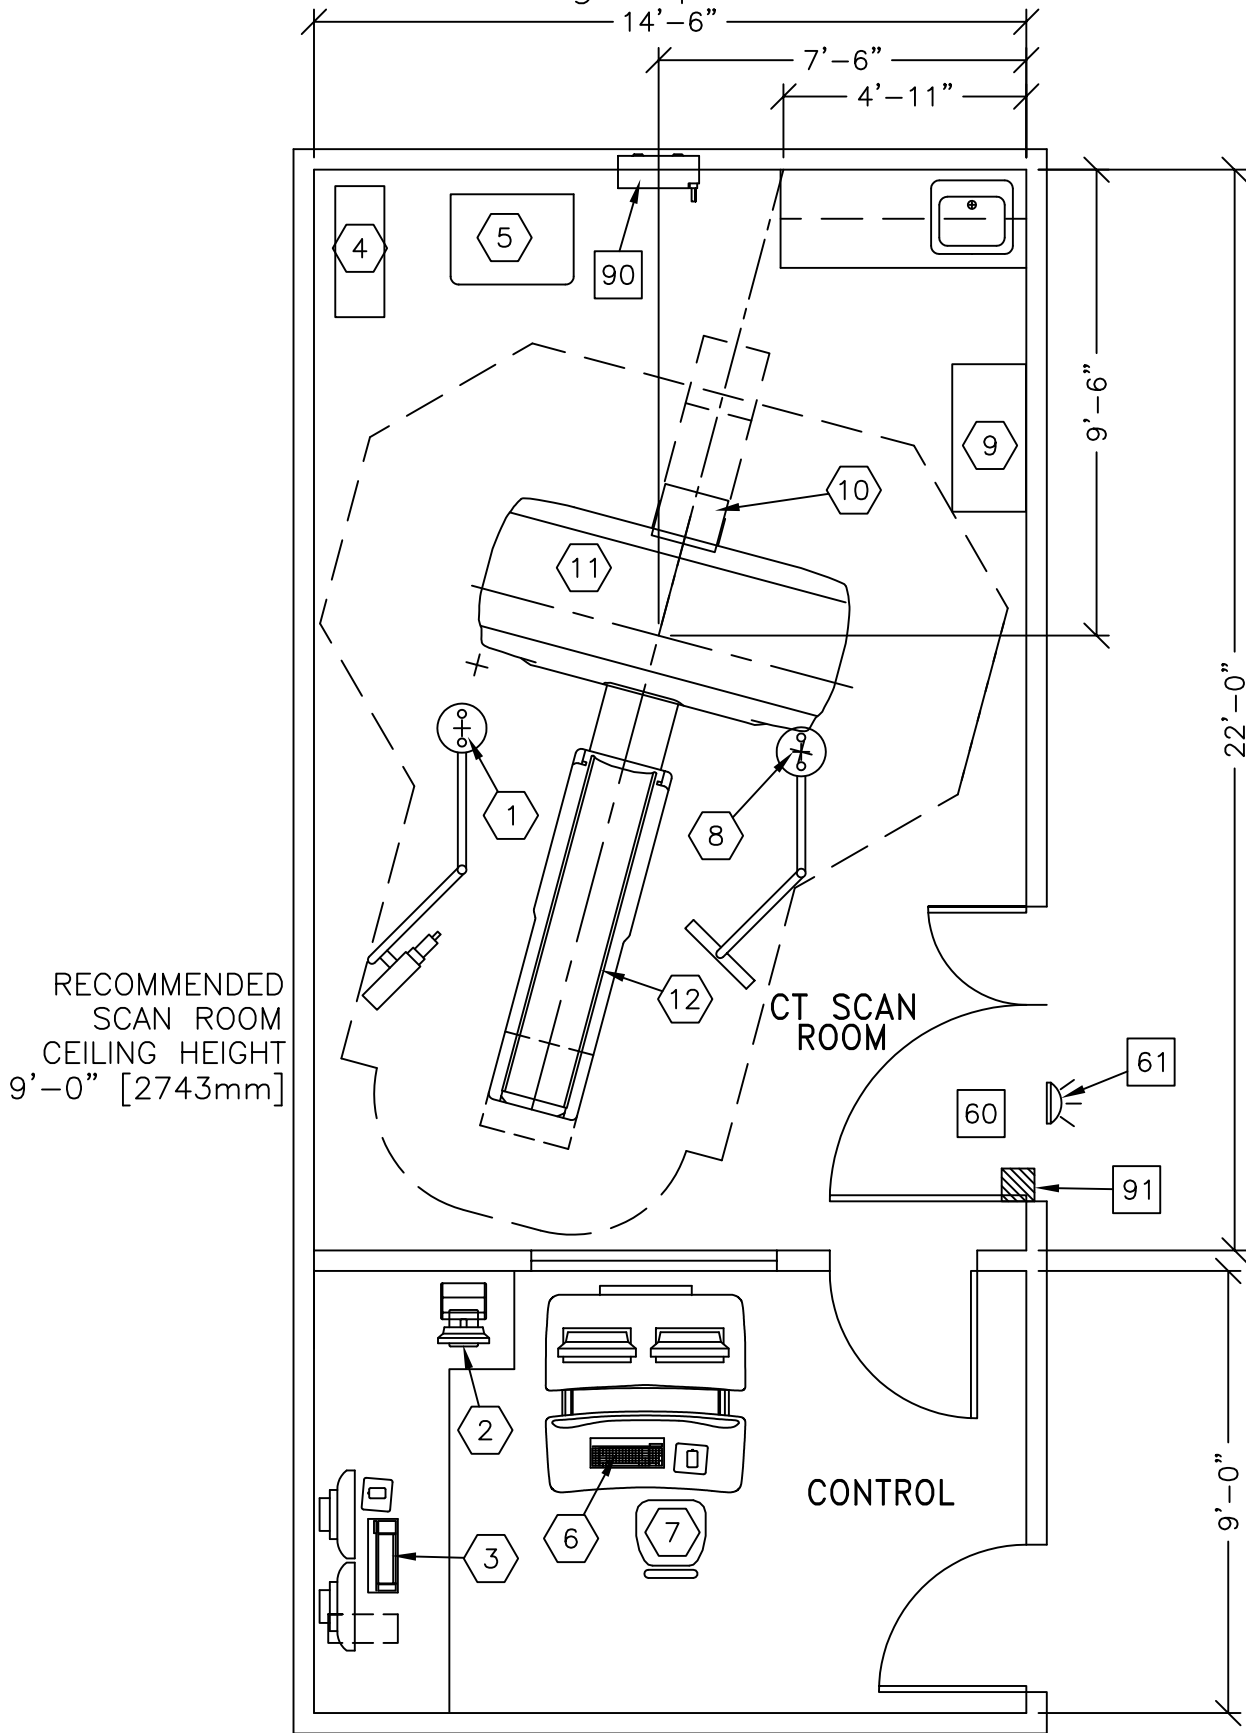

ROOM DIMENSIONS	LENGTH & WIDTH	CEILING HEIGHT
MINIMUM:	20-0" x 13'-6" [6.0M x 4.1M]	8'-6" [2.59M]



SEE APPENDIX "A" FOR POWER SPECIFICATIONS

ROOM PLAN LOCATED ON PAGE 6-50

ITEM	QUANTITY	ITEM DESCRIPTION	WEIGHT	HEAT OUTPUT
①	1	INJECTOR HEAD ON OVERHEAD COUNTERPOISED SUSPENSION, <OPTION>	79 lbs	
②	1	INJECTOR CONTROL AND ELECTRONICS <OPTION>	22 lbs	320 btu
③	1	ADVANTAGE WORKSTATION WITH TWO LCD MONITORS <OPTION>	81 lbs	1109 btu
④	1	UPS SYSTEM <OPTION>	350 lbs	
⑤	1	POWER DISTRIBUTION UNIT	701 lbs	3402 btu
⑥	1	OPERATOR'S CONSOLE / COMPUTER	493 lbs	8631 btu
⑦	1	OPERATOR'S CHAIR		
⑧	1	LCD MONITOR <OPTION>	61 lbs	300 btu
⑨	1	STORAGE CABINET		
⑩	1	REAR CABLE COVER		
⑪	1	CT LightSpeed Pro 16	4100 lbs	43003 btu
⑫	1	PATIENT TABLE WITH EXTENDED TABLE TOP.	736 lbs	682 btu
***** CUSTOMER/CONTRACTOR SUPPLIED AND INSTALLED ITEMS *****				
60		MINIMUM DOOR OPENING FOR EQUIPMENT DELIVERY IS 44 IN. W X 83 IN. H [1118MM X 2108MM], CONTINGENT ON A 96 IN. [2438MM] CORRIDOR WIDTH.		
61		X-RAY ON WARNING LIGHT-AVAILABLE FROM GE SUPPLY CALL: 800-200-9760 GE CAT. NO. WXIABWW-0F-XIU		
90		MAIN DISCONNECT CONTROL, - WALL MOUNTED - GE CAT. E4502AE, 125 LBS.		
91		X-RAY ROOM WARNING LIGHT CONTROL PANEL. GE CAT. NO. E4500RL FOR WARNING LIGHT CONTROL ONLY.		

ENVIRONMENT

Ambient Operation Temperature: 55-75° (F)
 Allowable Temperature Change: 15° (F) per hour
 Humidity: 20-80 percent non condensing
 Allowable Humidity Change: 10 percent per hour
 Max - Altitude: 8000 ft. above sea level